



# VENTUS PRINT & APPLY

## Ventus 920 Turning Applicator

### VENTUS MAKES MARKING EASY

Ventus Print & Apply System is designed and developed by KLINGER Finland. Due to the capability of real-time labelling the information as well as the product can easily be changed. Different attachment alternatives enable Ventus to label any product regardless of the industry your company is operating. Its modular structure gives an opportunity to customize your company a unique labelling solution with minimal costs.

In addition, its small and compact size makes it easy to install the system in different applications. Ventus fully combines the cost-effective price with reliability, endurance, flexibility and user-friendliness. Ventus even speaks your own language as well as standard English.

#### Key Features


- » Easy to adapt
- » Reliable
- » User-friendly
- » Settings can be easily modified
- » Two versions available: basic version and full Windows PC version
- » Can be connected to a network or WLAN
- » Robust metal frame



## PRODUCT DESCRIPTION

Ventus 920 applies the last-printed label to the moving product with a turning application head. It follows the surface of the product, which ensures that the label is carefully and thoroughly attached to the product. The structure of the application head is designed in such a way that the same head can be used to apply various-sized labels without any additional adjustments. Ventus 920 is the solution when the labelling has to be executed with speed and accuracy.

## APPLICATION POSITIONS

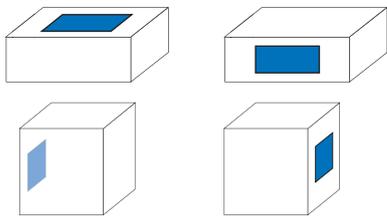

Ventus 920 can apply a label on top, to the side, in front or to the back of a product.

## Technical Specifications

|                  |                                                                                                                                     |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Label size:      | Width: 25-120 mm<br>Length: 40-150 mm                                                                                               |
| Speed:           | Max 60 labels/minute (label size 25 x 40 mm)                                                                                        |
| Compressed air:  | ~ 6 bar                                                                                                                             |
| Printer options: | All major printer brands available both thermal and thermal transfer, such as Sato, Zebra and Datamax O'Neil (200, 300 and 600 dpi) |
| Dimensions:      | Height: 700 mm<br>Width: 500 mm<br>Depth: 350 mm (without printer)                                                                  |
| Weight:          | Frame: 29 kg<br>Printer: approximately 12 kg (depending on model)                                                                   |

## RECOMMENDED APPLICATIONS

We have delivered Ventus Print & Apply solutions to many different industries ie. food, chemistry, cosmetics, building materials and wood industries.