


## Collamat ECO Series

Industrial label applicator range designed for simple labelling applications. Self-adhesive labels up to 95mm wide can be applied to regular shaped products on the side, top or bottom.

Three Collamat ECO Series label applicators are available with dispensing speeds up to 15, 25 and 50m/min.

The modular design allows applicators to be easily converted between left-hand and right-hand operation as well as allowing a thermal transfer print engine to be fitted for print-and-apply operation.

Despite their low price, Collamat ECO Series share the same build quality and reliability as all other Collamat labellers.

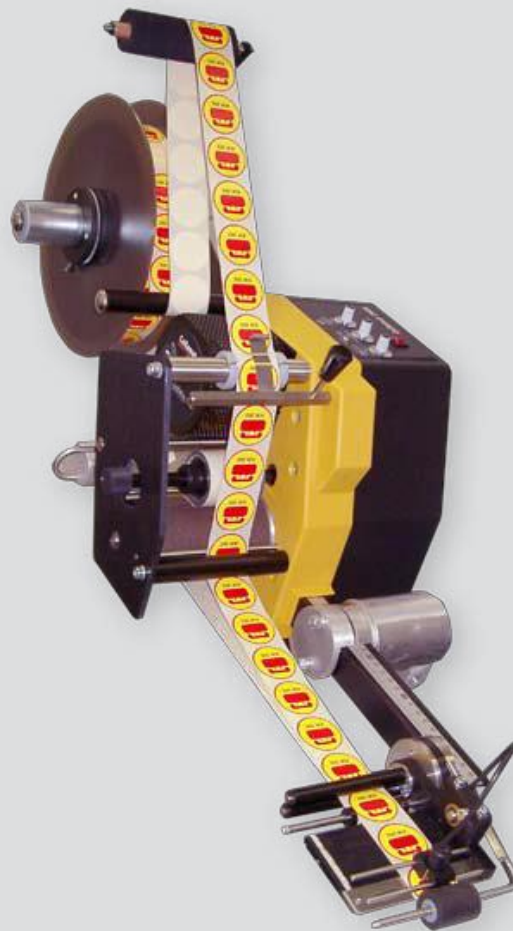



### Features

- Compact design allows easy installation in restricted space
- Side, top or bottom apply
- Simple web path allows quick changeover between label rolls
- High precision: +/-1mm for 2610 and +/-0.7mm for 4310 and 7310
- Simple controls – potentiometer adjustment for speed, label sensor sensitivity & pre-dispense
- Swiss made – high build quality & reliability

### Technical Data

	2610	4310	7310
Label web width (incl. backing):	10 - 95mm	10 - 95mm	10 - 95mm
Dispense speed:	3 -15m/min	1 – 25m/min	1 – 50m/min
Accuracy:	+/- 1mm	+/- 0.7mm	+/- 0.7mm
Minimum label length:	10mm	10mm	10mm
Label supply roll:	250mm	250 or 350mm	250 or 350mm
Drive:	2 phase stepper motor		
Potentiometer controls:	Speed, label sensor sensitivity & pre-dispense length		
Applicator module:	Fixed beak with spring loaded pinch rollers		
Orientation:	Right-hand and left-hand		
Options:	Kit for side labelling applications		
Voltage:	115 – 230Vac, 50 – 60Hz		

**Martek Industries Ltd**  
 12B Ridings Park Ind. Est  
 Eastern Way  
 Cannock  
 Staffordshire  
 WS11 7FJ

[www.martekindustries.co.uk](http://www.martekindustries.co.uk)  
[sales@martekindustries.co.uk](mailto:sales@martekindustries.co.uk)  
 Tel: 01543 502202  
 Fax: 01543 467726

